
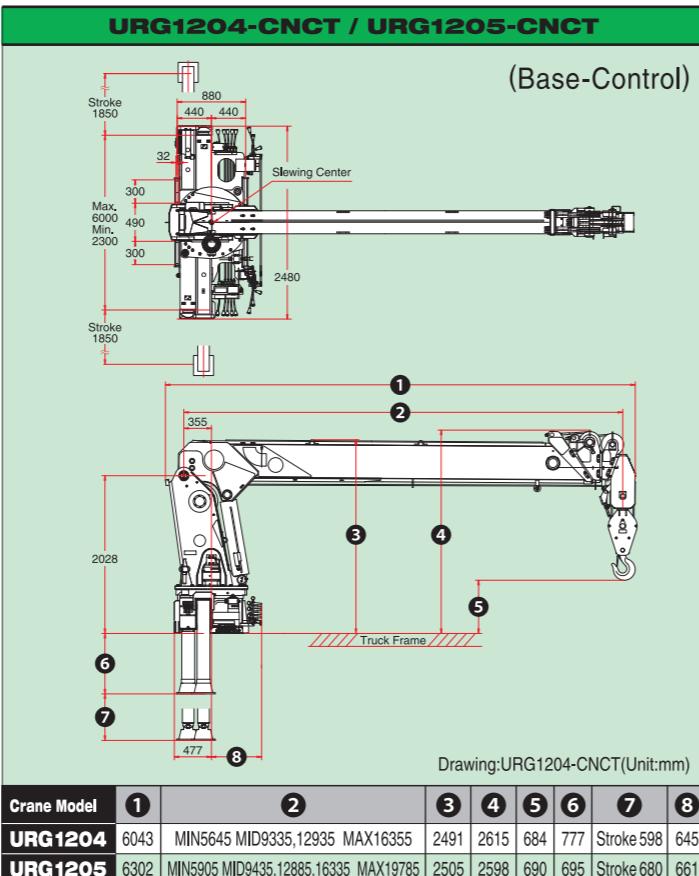


Specifications Table


Crane Model	URG1204	URG1205
Maximum Lifting Capacity		12,100kg × 2.5m
Maximum Hook Height	17.7m	21.02m
Working Radius	Min. 1.23m ~ Max. 16.0m	Min. 1.10m ~ Max. 19.43m
Boom Length	Min. 5.65m ~ Max. 16.36m	Min. 5.91m ~ Max. 19.79m
Boom Sections	4	5
Boom Raising Angle	Min. -0.4° ~ Max. 76°	
Slewing Angle (Continuous)	360°	

Crane Mounting Dimensions

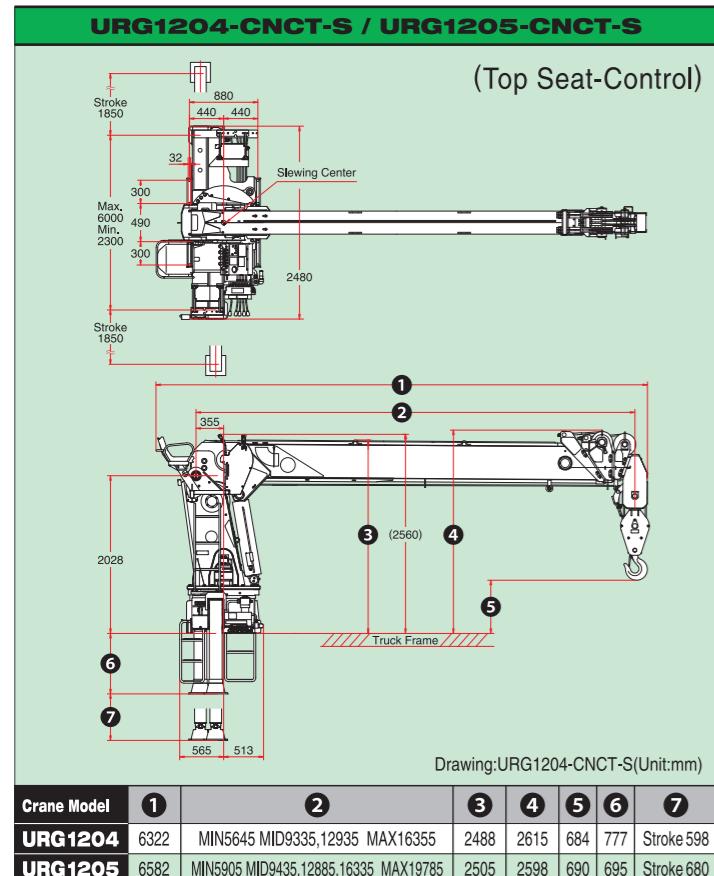

Operational advantages...


High or low tight, UNIC straight-boom wire-rope cranes match the task. They're great high-lift performers. Lifting loads over walls is also no problem with their unrestricted raising and lowering. In deep-hole jobs they're strong, and accurate. Many extra safety features, too.

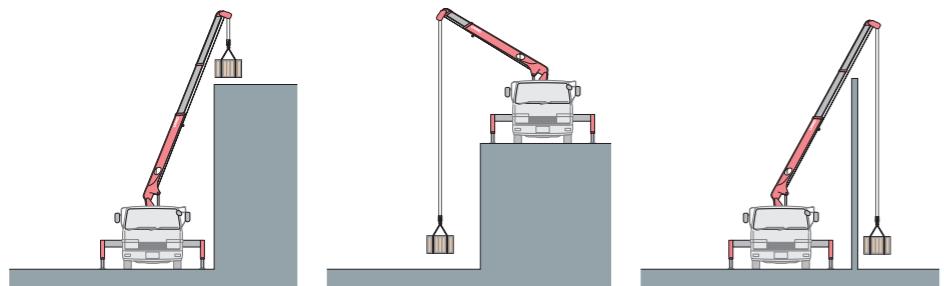

Buildings, walls, whatever, with UNIC wire-rope cranes you get precise high-lift placement and safe, sure operation. Their dependability is all in their strength and design, original UNIC features.

Higher performance, too, at lower depths. UNIC wire-rope cranes handle heavy loads in deep-hole jobs with accuracy and stability. A wide range of models assures versatile matching to job requirements.

Tight places are the right places for UNIC wire-rope cranes. In any operating situation their strong steel cables mean extra dependability and safety. High, low, or tight, UNIC wire-rope cranes are always right.

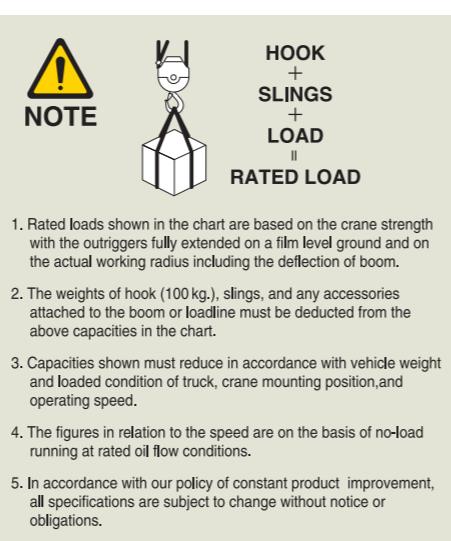

FURUKAWA UNIC CORPORATION

<https://uniccrane-global.com>

Authorized **UNIC** distributor

UNIC

Truck-Mounted UNIC Crane

URG1200-CNCT
SERIES





FURUKAWA UNIC CORPORATION


URG1200-CNCT SERIES

**Heavy duty and Top safety,
Reliable on the job**

Model	URG1204	URG1205
Maximum Lifting Capacity	12100kg	
Maximum Hook Height	17.7m	21.02m
Maximum Working Radius	16.0m	19.43m

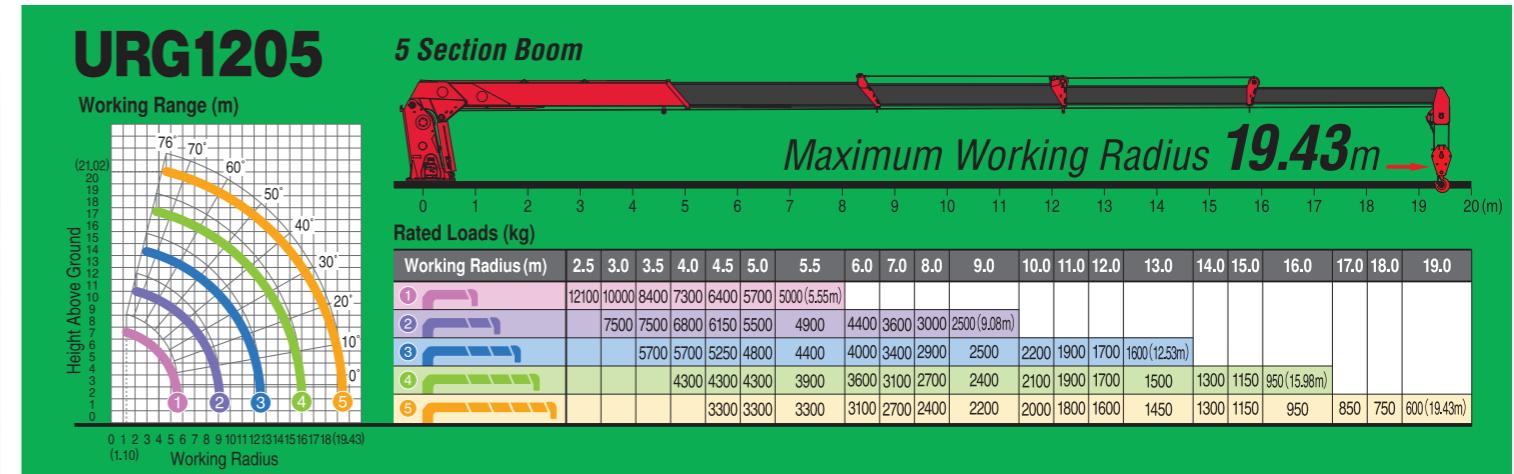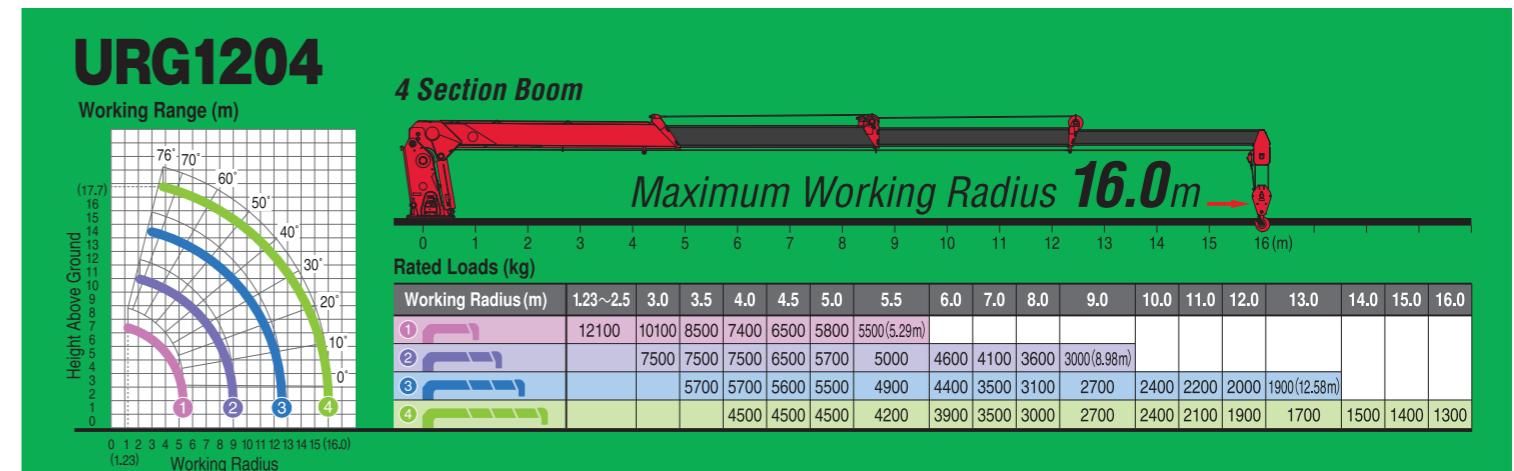


Standard Equipment

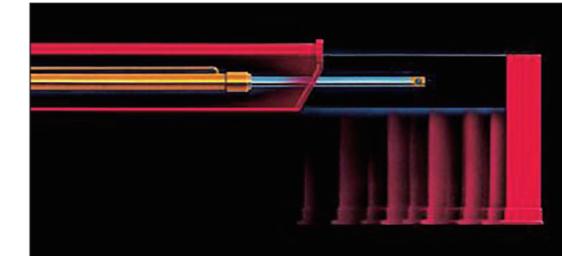

Hydraulic Horizontal Outrigger



Rear Outrigger



Base-Control




Oil Cooler


Safety Devices



Alarm for Overwinding/
Automatic Stop for Overwinding



Automatic Hook
Stow System



Manual lock System
for Slewing



Derrick Cylinder
Pressure Alert System

Option



Top Seat-Control



Outrigger Span
Extended; 7.73m

Wide Outrigger



Safe Load Indicator with
3-Color indicator lamp

